

Signal converter

Frequency divider	FT 1D-1D	HTL, TTL / RS422
--------------------------	-----------------	-------------------------




The frequency divider FT 1D-1D is intended for the error-free division of frequencies or pulses from conventional encoders, sensors or other incremental measuring systems. Four readily accessible DIL switches allow programming division ratios from 1:1 up to 1:4096 and the desired representation of the direction of rotation. A separately adjustable divider is available for the zero pulse.


The module can be easily and conveniently mounted in a cabinet on a standard DIN rail.



Power supply



Limit frequency



DIN-rail mounting

Features

- Level conversion from HTL single ended, RS422 to HTL differential and vice-versa.
- Limit frequency 1 MHz
- Division of double-track (A, B, 90°) pulses with adjustable ratio from 1 : 1 to 1 : 4096.
- Division of the Z pulse with adjustable ratio from 1 : 1 to 1 : 256.
- Push-pull outputs for direct PLC control.
- External input for zeroing the A/B/Z divider (defined start / stop).
- Independent second Z divider adjustable.
- Z pulse division ratio adjustable.

Benefit

- Frequency reduction for slow controls.
- External scaling for controls.
- Active signal adaptation for High/Low level.
- Adjustable zero pulse for specific applications

Order no.		
Frequency divider	8.FT.1D-1D	Scope of delivery - Frequency divider - Manual

Signal converter

Frequency divider	FT 1D-1D	HTL, TTL / RS422
--------------------------	-----------------	-------------------------

Technical data

Electrical characteristics	
Power supply	9 ... 30 V DC (residual ripple ≤ 10 % at 24 V DC)
Power consumption (encoder supply without load)	at 9 V approx. 40 mA at 30 V approx. 30 mA
Type of connection	screw terminal, 1.5 mm ²
Encoder supply	output voltage +5.5 V DC / ±5 % output current max. 130 mA type of connection screw terminal, 1.5 mm ²

Mechanical characteristics	
Material	housing plastic
Mounting	35 mm DIN rail (acc. to EN 60715)
Dimensions (W x H x D)	22.5 x 102 x 102 mm [0.89 x 4.02 x 4.02"]
Protection	IP20
Weight	approx. 100 g [3.53 oz]
Working temperature	0 °C ... +60 °C [+32 °F ... +140 °F] non condensing
Storage temperature	-25 °C ... +70 °C [-13 °F ... +158 °F] non condensing
Failure rate (MTBF in years)	109,3 a continuous operation at 60 °C [140 °F]

Approvals	
CE compliant in accordance with	
EMC Directive	2014/30/EU
RoHS Directive	2011/65/EU

Incremental input X4	
Signal level	TTL / RS422 differential voltage > 1 V HTL LOW: 0 ... 4 V / HIGH: 10 ... 30 V
HTL internal resistance	Ri ≈ 4.7 kOhm
Tracks	TTL / RS422, symmetrical A, /A, B, /B, 0, /0 (RS422, HTL differential) HTL, asymmetrical A, B, 0
Frequency	HTL differential max. 1 MHz (HTL differential signal > 2 V) HTL single ended max. 350 kHz, Level 1: Low 0 ... 10 V, High 14 ... 30 V Level 2: Low 0 ... 5 V, High 9 ... 30 V TTL max. 350 kHz, Low 0 ... 0.7 V, High 2.2 ... 5 V
Type of connection	HTL, TTL / RS422 screw terminals, 1.5 mm ²


Incremental output X3	
Level	8 ... 29 V at HTL (depending on the supply voltage)
Tracks	TTL / RS422, symmetrical A, /A, B, /B, 0, /0 (5 V DC) HTL, asymmetrical A, B, 0
Output current	max. 20 mA / Push-Pull
Type of connection	screw terminals, 1.5 mm ²

Control input X2	
Level	HTL, PNP Low 0 ... 5 V, High 9 ... 30 V
Tracks	frequency max. 20 kHz response time 50 us
Input current	max. 3 mA
Type of connection	screw terminals, 1.5 mm ²

Signal converter

Frequency divider	FT 1D-1D	HTL, TTL / RS422
--------------------------	-----------------	-------------------------

Terminal assignment

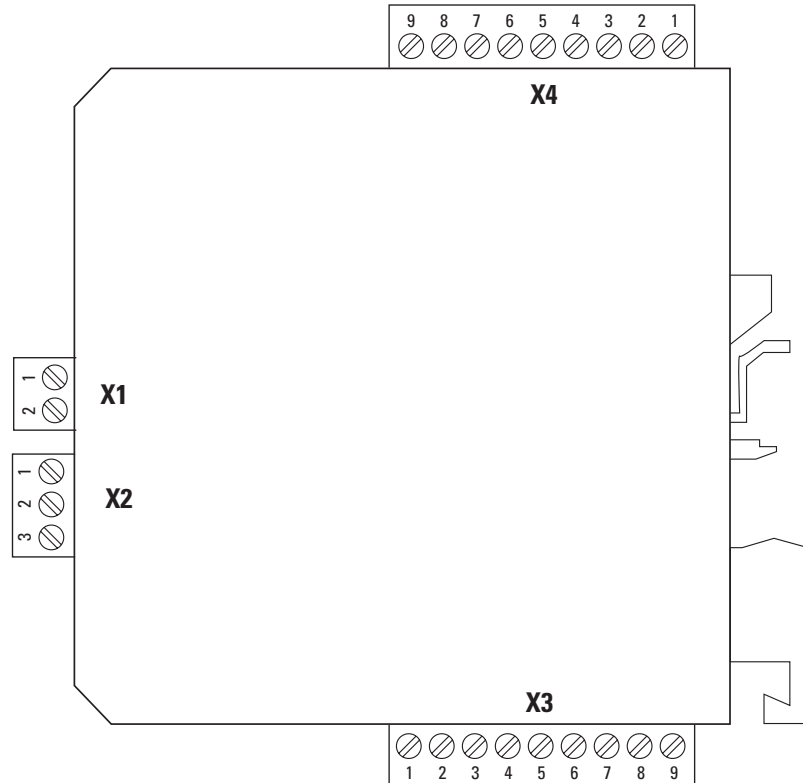

Interface	Function	Screw terminals, 2-pin		
Connection X1	Power supply	Signal:	0 V	+V
		Pin:	1	2

Interface	Function	Screw terminals, 3-pin			
Connection X2	Control input	Signal:	GND	Contr. 1	Contr. 2
		Pin:	1	2	3

Interface	Function	Screw terminals, 9-pin									
Connection X3	Incremental output	Signal:	ERR	GND	A	\bar{A}	B	\bar{B}	0	$\bar{0}$	GND
		Pin:	1	2	3	4	5	6	7	8	9

Interface	Function	Screw terminals, 9-pin									
Connection X4	Incremental input	Signal:	GND	$\bar{0}$	0	\bar{B}	B	\bar{A}	A	GND	+5 V _{out}
		Pin:	1	2	3	4	5	6	7	8	9

- +V : Power supply
- 0 V : Encoder power supply ground GND (0 V)
- Contr. 1 / 2 : Control inputs
- GND : Frequency divider power supply ground (0V)
- Error : Error output
- A, \bar{A} : Incremental output channel A (Cosine)
- B, \bar{B} : Incremental output channel B (Sine)
- 0, $\bar{0}$: Reference signal

Signal converter

Frequency divider	FT 1D-1D	HTL, TTL / RS422
--------------------------	-----------------	-------------------------

Dimensions

Dimensions in mm [inch]

